



Parameter	Symbol	Rating	Units
Load Voltage	VL	60	V
Load Current	IL	1.3	A
On Resistance	Ron	0.13	Ω
I/O Breakdown Voltage	VISO	2500	Vrms

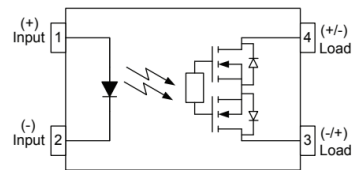

RoHS Pb-Free Halogen-Free UL E534710

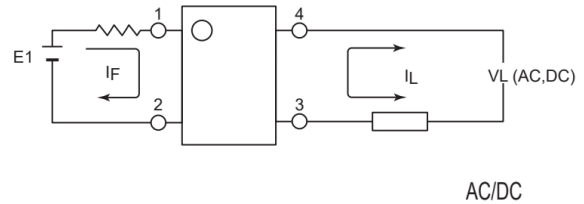

1. LED Anode
2. LED Cathode
- 3, 4. Drain (MOS FET)

PhotoRelays

Photorelays are the most reliable, technically advanced logic-to-power interface devices. Their basic function is to take a low current signal from a microprocessor to control the switching of both AC and DC loads, while providing an isolation barrier between logic and power. While this function is common to all relays, Photorelays provide distinct advantages over their mechanical counterparts including:

- Long life (No limit on mechanical and electrical lifetime)
- Bounce-free switching
- Higher speed and high frequency switching
- Higher sensitivity (less power consumption)
- Immunity to EMI or RFI
- No voltaic arc, bounce, and noise
- More resistant to vibration and impact
- AC or DC load switching
- Small package size

Function

PhotoRelays operate by taking a low level input current (<5mA) that energizes an input Infrared LED, which is optically-coupled to a Photo-diode array chip. This IC in turn generates a photo voltage that powers two MOSFETs typically connected in a source-to-source configuration, allowing for both AC and DC output loads. Photorelay basically move photons to accomplish their switching function, they incur no mechanical wear and tear, providing consistent reliable switching.


Applications

These advantages make Photorelays the ideal choice for:

- Telecom/Datacom switching
- Multiplexers
- Meter reading systems
- Data acquisition
- Medical equipment
- Battery monitoring
- I/O Sub-Systems
- Robotics
- Aerospace
- Home/Safety security systems
- Process Control
- Energy Management
- Reed Relay EMR Replacement
- Programmable Controllers

TYPES

Category	Output Rating		Package	Part No.	Packing Quantity
	Load Voltage	Load Current			
AC / DC	60V	1.3A	SOP-4	OPT1212G1S	2000pcs /reel

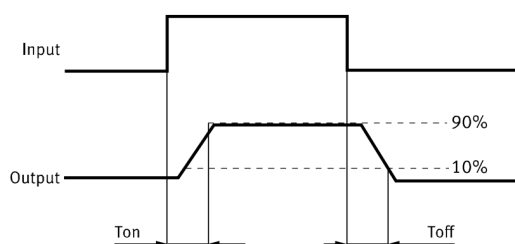

Absolute Maximum Ratings (Ta = 25°C)













Item		Symbol	Value	Units	Note
Input	Continuous LED Current	IF	50	mA	
	Peak LED Current	IFP	1000	mA	f=100Hz, duty=1%
	LED Reverse Voltage	VR	5	V	
	Input Power Dissipation	Pin	75	mW	
Output	Load Voltage	VL	60	V(DC peak or AC)	
	Load Current	IL	1.3	A	
	Peak Load Current	IPeak	4.0	A	100ms (1 pulse)
	Output Power Dissipation	Pout	380	mW	
Total Power Dissipation		PT	450	mW	
I/O Breakdown Voltage		VI/O	2500	Vrms	RH=60%, 1min
Operating Temperature		Topr	-40 to 85	°C	
Storage Temperature		Tstg	-40 to 100	°C	
Pin Soldering Temperature		Tsol	260	°C	10 sec max.

Electrical Characteristics (Ta = 25°C)

Item		Symbol	MIN.	TYP.	MAX.	Units	Conditions
Input *	LED Forward Voltage	VF		1.32	1.5	V	IF=10mA
	Operation LED Current	IFon		0.6	1.5	mA	
	Recovery LED Current	IFoff		0.2	0.5	mA	
	Recovery LED Voltage	VFoff	0.7			V	
Output	On-Resistance	Ron		0.13	0.3	Ω	IF=5mA, IL=100mA, within 1 sec.
	Off-State Leakage Current	ILeak		0.10		uA	VL=Rating
	Output Capacitance	Cout		151		pF	VL=0, f=1MHz
Transmission	Turn-On Time	Ton		0.30	1.3	ms	IF=5mA, IL=100mA,
	Turn-Off Time	Toff		0.05	2.0	ms	
Coupled	I/O Isolation Resistance	RI/O	10 ¹⁰			Ω	DC500V
	I/O Capacitance	CI/O		0.8	1.5	pF	f=1MHz


* To ensure satisfactory performance of the device across the temperature range, taking into account both circuit loss and interference, it is recommended to operate when the working condition is: IF (input current) ≥ 5 mA and ≤ 30 mA

Engineering Data (Typical Characteristics)

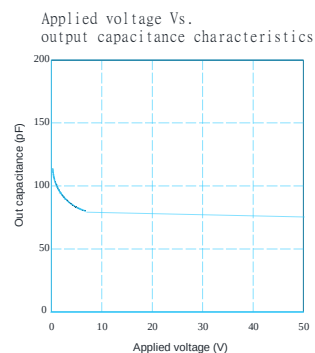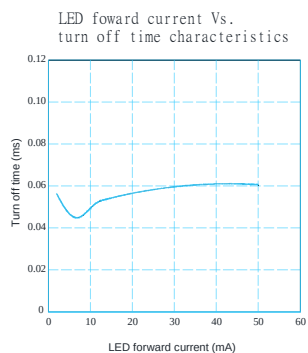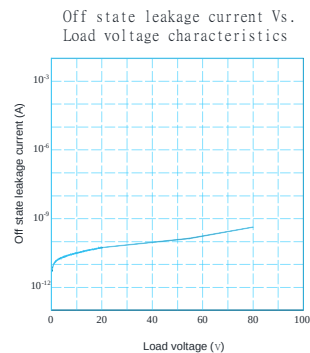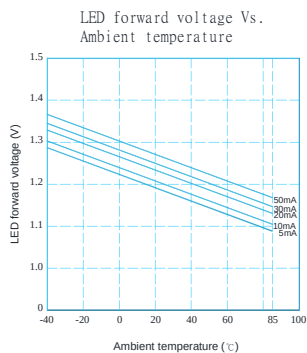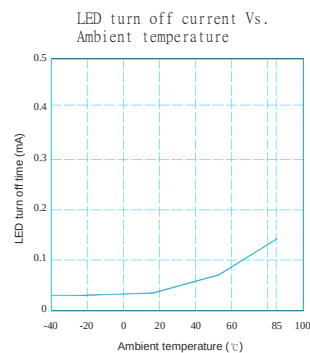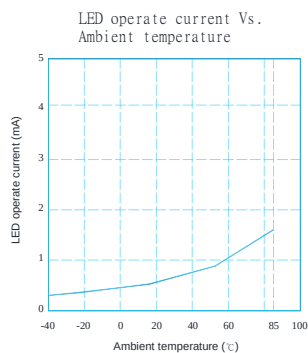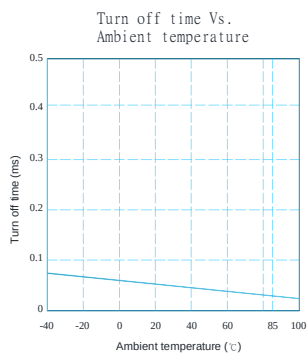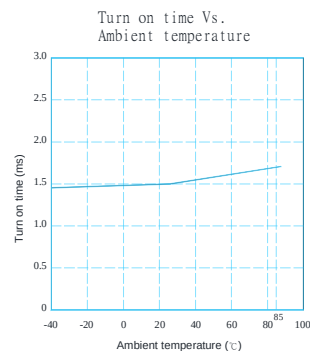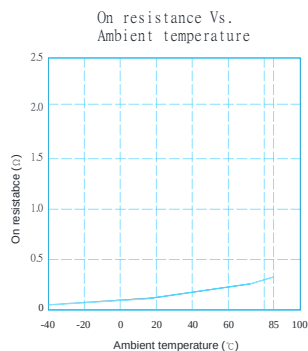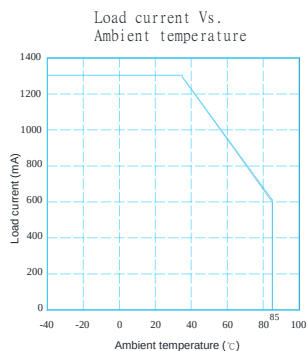


Dimensions and Package


Marking

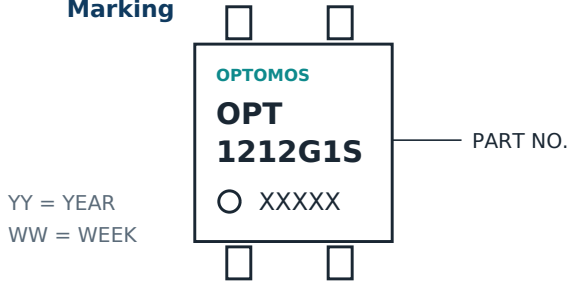


Surface mount terminal type

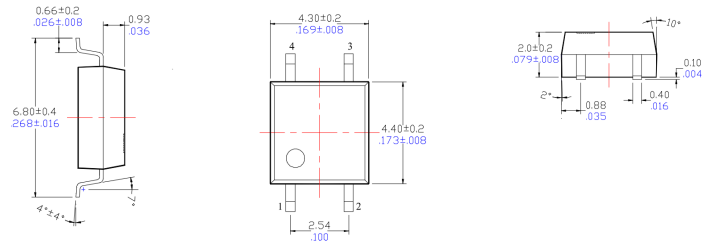


Label

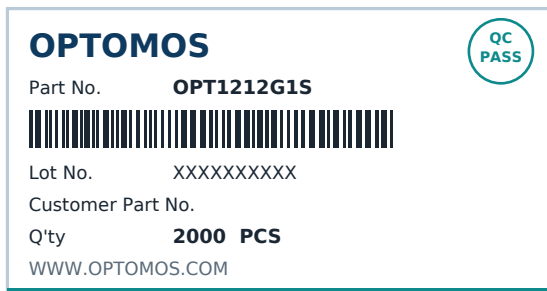



Recommended mounting pad (Top view)



Tape dimensions


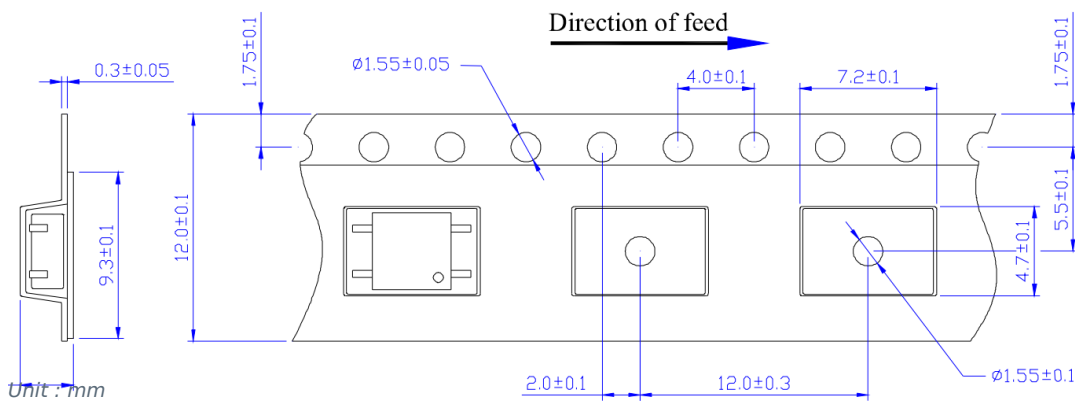


Dimensions of tape reel

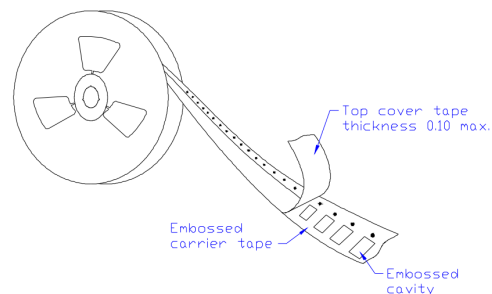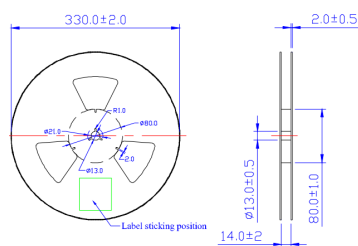


Using Methods

Examples of resistance value to control LED forward current ($I_F = 5\text{mA}$)



E1	R1 (Approx)
3.3V	300 Ω
5.0V	600 Ω

LED forward current must be more than 2mA, at $I_F(\text{MIN})$, and less than 30mA, at $I_F(\text{MAX})$.

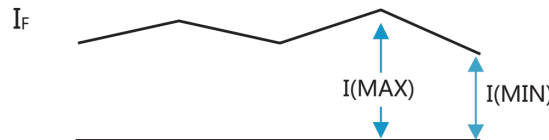

Recommended Operating Conditions

Please obey the following conditions to ensure proper device operation and resetting. Input LED current (Recommended value):


Characteristic	Symbol	Min	Typ.	Max	Unit
Forward current	I_F	5.0	7.0	30	mA

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics. Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.

Characteristic	Symbol	Min	Typ.	Max	Unit
Load voltage (Peak AC)	V_L	—	—	440	V

Surge voltages at the input

If reverse surge voltages are present at the input terminals, connect a diode in reverse parallel across the input terminals and keep the reverse voltages below the reverse breakdown voltage. Typical circuits are below shown.

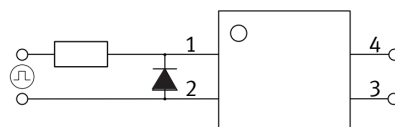


Protection Circuit

Output spike voltages: if an inductive load generates spike voltages which exceed the absolute maximum rating, the spike voltage shall be limited.


Clamp diode is connected in parallel with the load.

Absorb capacity with external diode.

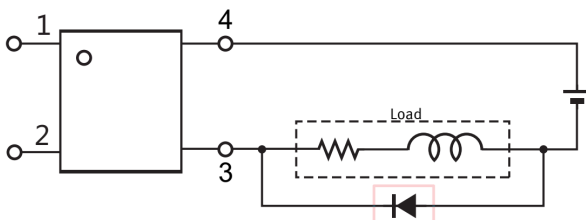

CR Snubber is connected in parallel with the load.

Absorb capacity with buffer capacity.

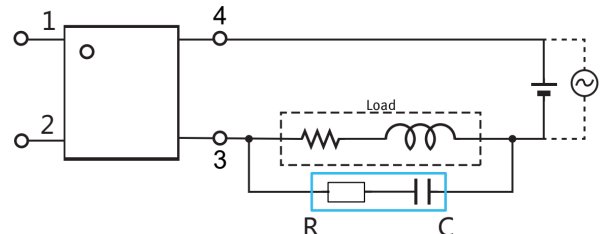

When adding diodes, buffer circuits (C-R), and other protections, they need to be installed near the MOS RELAY to be effective. Adding protection elements may result in a slow reset time, so adjust them according to the actual situation before use.


Note: When developing designs using this product, perform the expected performance of the equipment under the operating conditions recommended by the guidelines in this document. Continuous use under heavy loads (including, but not limited to, the application of high temperatures/current/voltage and significant changes in temperature, etc.) may result in deterioration of the reliability of this product.

Recommended Soldering Conditions

(a) Infrared reflow soldering :

- Peak reflow soldering : 260°C or below (package surface temperature)
- Time of peak reflow temperature : 10 sec
- Time of temperature higher than 230°C : 30-60 sec
- Time to preheat temperature from 180~190°C : 60-120 sec
- Time(s) of reflow : Two
- Flux : Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

Recommended Temperature Profile of Infrared Reflow

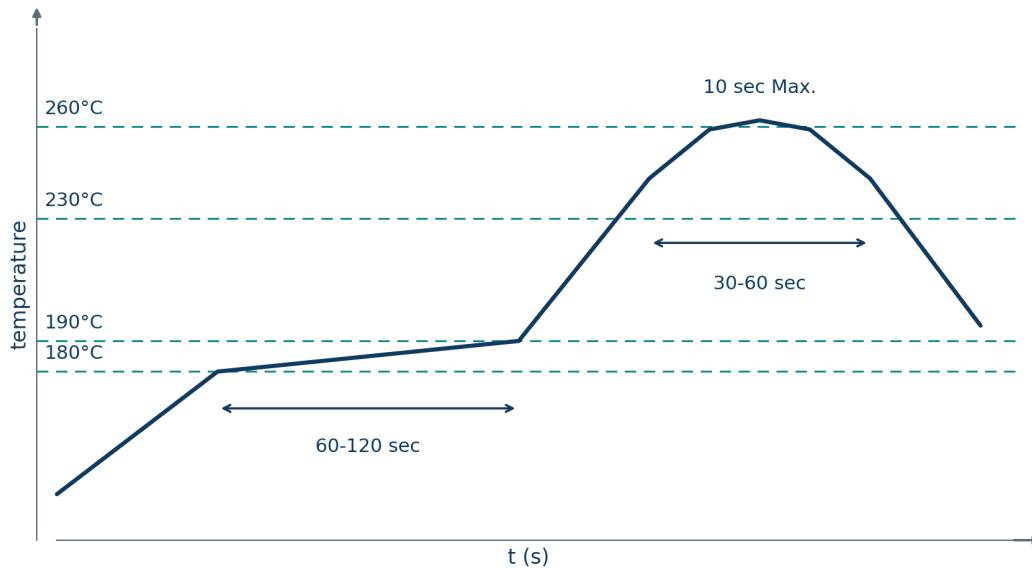

(b) Wave soldering :

- Temperature : 260°C or below (molten solder temperature)
- Time : 10 seconds or less
- Preheating conditions : 120°C or below (package surface temperature)
- Time(s) of reflow : One
- Flux : Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt% is recommended.)

(c) Cautions :

- Fluxes : Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent.
- Avoid shorting between portion of frame and leads.

■ RESTRICTIONS ON PRODUCT USE

OPTOMOS Co. and its subsidiaries and affiliates (collectively "OPTOMOS") reserve the right to make changes to all information contained in this document relating to hardware, software, and systems (collectively "Products").

No information in this document may be reproduced without the prior written permission of OPTOMOS. Even with OPTOMOS's written permission, this document may only be reproduced if it is guaranteed to be unaltered or missing. OPTOMOS assumes no responsibility for unintended uses of the product:

Unintended uses include, but are not limited to, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, automobiles, trains, ships, and other transportation equipment, traffic signalling equipment, equipment used for the control of combustion or explosions, safety devices, elevators and escalators, equipment used in electrical power-related applications, and equipment used in financial-related applications.

OPTOMOS assumes no responsibility for the product if you use it for any purpose other than the specific purpose described in this document.

- The information contained herein is provided only as a guide for the use of the product. OPTOMOS assumes no responsibility for infringement of third party patents or any other intellectual property rights that may result from the use of the product. This document does not grant any license, express or implied, estoppel or otherwise, to any intellectual property.
- GaAs (Gallium Arsenide) is used in products and is harmful to humans. Inadvertent ingestion or absorption of GaAs can harm the human body, so handle the product with care and do not break, cut, crush, grind, chemically dissolve, or otherwise expose GaAs in the product.
- Please be aware of environmental issues and use products in compliance with all applicable laws and regulations governing the inclusion or use of controlled substances, including but not limited to the EU RoHS Directive. OPTOMOS assumes no responsibility for damages or losses resulting from non-compliance with applicable laws and regulations.